

Rock Drill MH502AFR

Key Features:


- Integral oiler provides continuous & efficient lubrication
- Graduated ratchet throttle control ensures accuracy in collaring holes
- Tough latch retainer provides extra support to collar and reduces wear
- T-handle for increased comfort
- Blower lever for deep hole cleaning
- High speed drilling
- Low maintenance

Specifications:

Specifications	Metric	Imperial
Weight	26 kg	57.3 lb
Shank Size	22 x 108 mm	7/8 inX4¼ in
Optional Shank Size	25 x 108 mm	1 inX4¼ in
Length	584 mm	23 in
Air Consumption	48 l/s	3/4 in Swivel
Air Inlet	20 mm	0.78 in
Penetration Rate	425 mm/min	17 in/min
Hose Connections	Ø 19 mm	Ø 3/4 in
Piston Diameter	65 mm	1.97 in
Max Drilling Diameter	50 mm	1¾ in
Max Drilling Depth	3000 mm	118 in
Impact Rate	2220 BPM	
Revolutions	180 RPM	

Ordering Part No. :

Part No.	Chuck Size
5111 116 000 52	22 x 108 mm (7/8 in x 4¼ in)

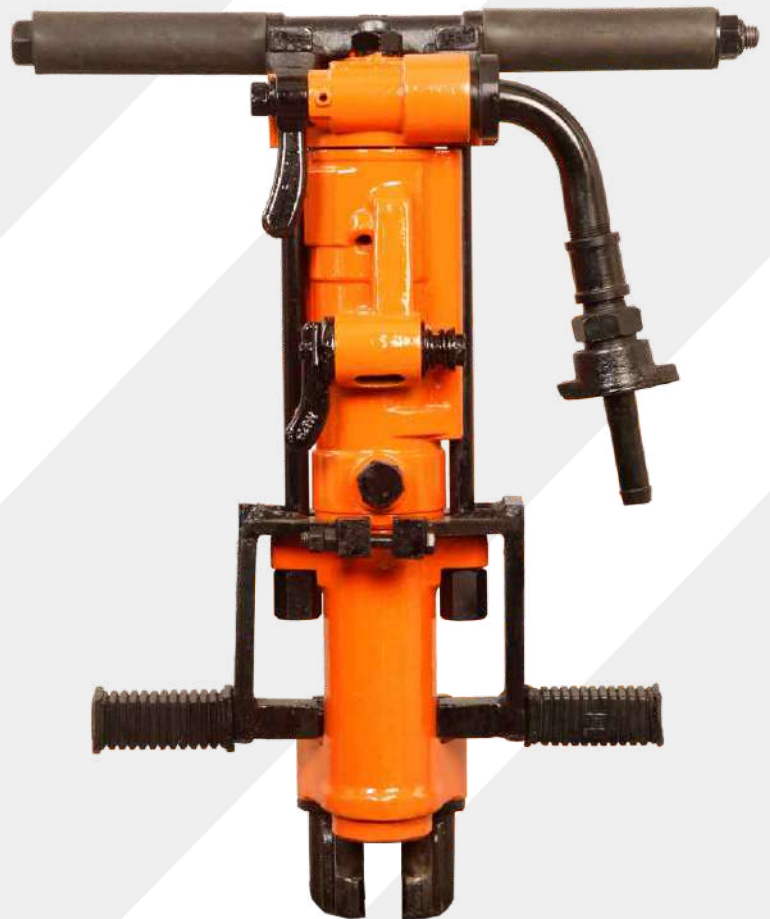

Reliability Unparalleled. Power Unmatched.