


Underground Drill S25

Key Features:

- High penetration speed
- Rig mount option for dimensional stone and quarrying applications
- Ideal for development of end drilling
- Hard hitting machine with versatile applications
- Can be used to install roof bolts
- Parts interchangeable with S25 drill

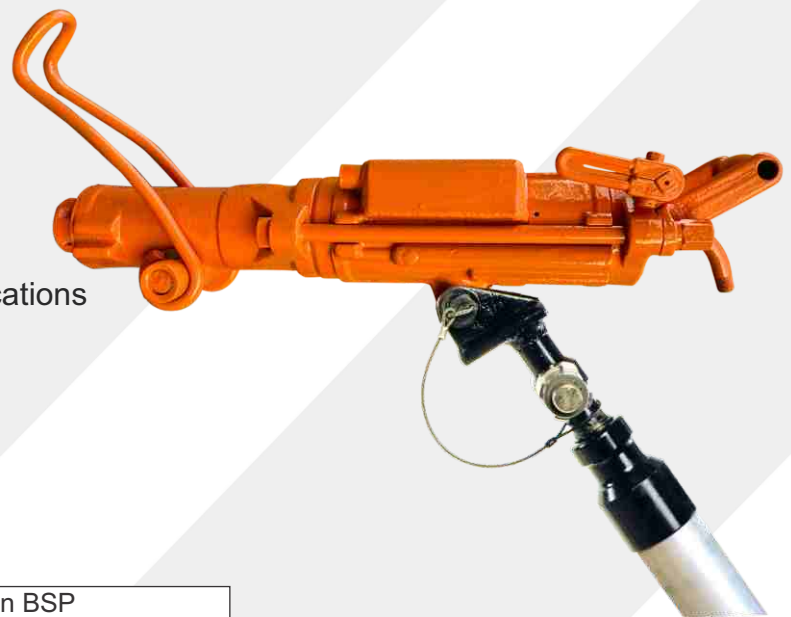

Specifications:

Air Connection	3/4 in BSP
Water Connection	1/2 in BSP
Drill Steel Chuck Hex	22 mm or 25 mm x 159 mm
Length incl. Drill Steel retainer	760 mm
Water Consumption (lt/min)	7.6 @ 450 kPa
Bore	79 mm
Stroke	70 mm
Weight	31 kg
Impact Rate	2000 @ 500 kPa
Air Consumption	145 @ 500 kPa

Ordering Part No. :

Part No.	Chuck Size
5111 105 000	22 x 158 mm (7/8 in x 6 1/4 in)
5111 105 000 50	25 x 158 mm (1 in x 6 1/4 in)

Issue no 2, Issue date 09/07/2022



Reliability Unparalleled. Power Unmatched.

Export Sales: +91 98303 92522 | Domestic Sales: +91 98305 52526 | Website: www.mindrill.com
Email: marketing@mindrill.com